


## 16-output contact closure module

The Click 100 collects real-time data from the Wavetronix SmartSensor and translates it into contact closure outputs. Sixteen separate outputs emulate up to eight lanes of two-loop data. The module mounts to a DIN rail and includes a hot-swappable power and communication bus for easy installation.



- Device has 16 contact closure outputs
- 8 lanes, dual loop traps
- Autobauds to SmartSensors
- Auto-configures loop trap emulation
- Keyed removable screw terminals
- 16 LEDs for contact closure verification
- 4 LEDs for mode selection
- Compatible with SmartSensor V, HD, and Advance
- Conformal coated
- Presence: dual-loop speed trap emulation with dynamic closure duration
- Pulse: dual-loop speed trap emulation with fixed closure duration (125 ms)
- Actuation: single loop emulation (true presence)
- One-loop speed: single loop emulation with contact closure duration based on speed
- NEMA tested

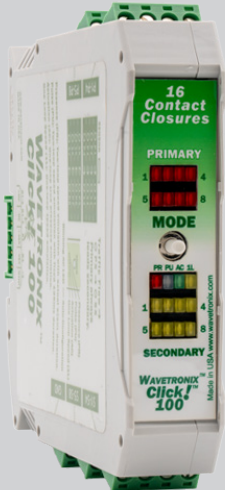