



16-channel contact closure eurocard

The Click 111 contact closure card provides 16-channel contact closure outputs between the Wavetronix SmartSensor and compatible outstations. The card plugs into a detection card slot and automatically detects baud rates from the sensor.

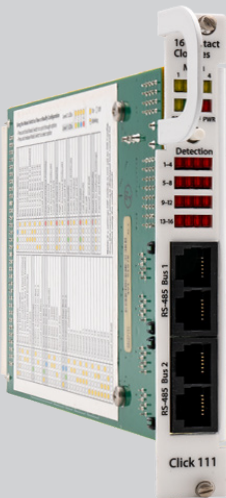

- Uses industry-standard RS-485 communication
 - Automatically sets baud rate
 - Displays detection and fault state
 - Dual communication ports support data from two sensors
 - Fail-safe mode in case of interruption of data flow
 - Solid state outputs
 - Master fault output
 - Configurable via hardware (DIP switches) or software (front panel interface or Click Supervisor)
 - Software configuration is read-only when in Hardware Configuration mode
- Fault state and output polarity configurable

TOP

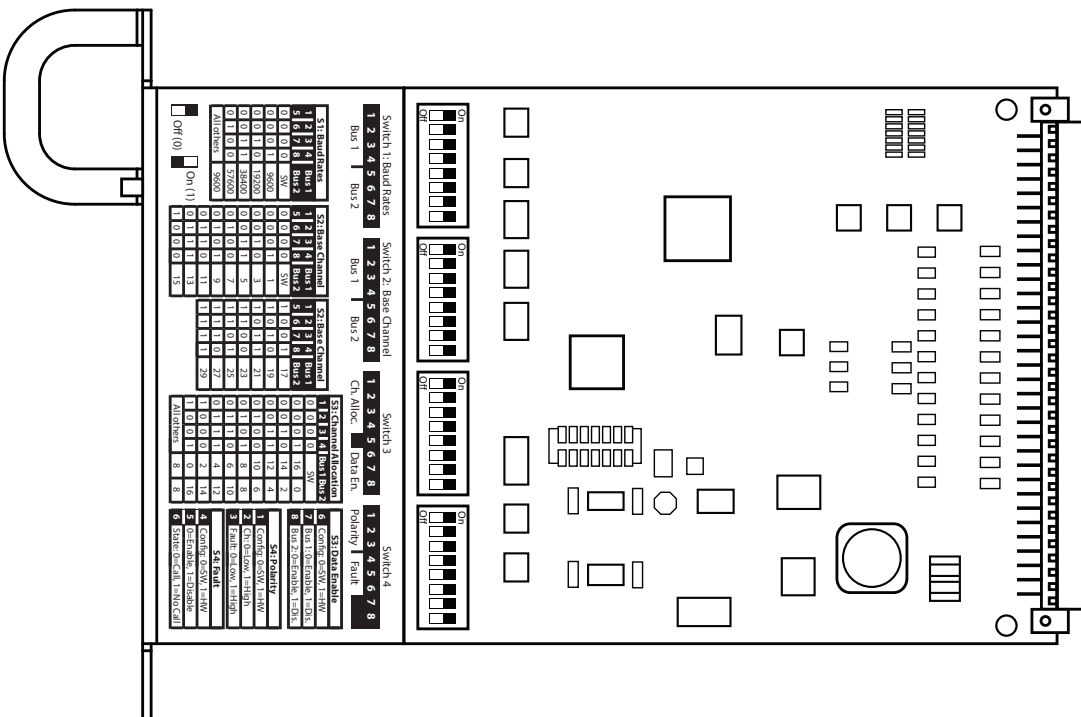

FRONT

