


## Detector rack cards

The Click 112/114 are 2-/4-channel contact output rack cards that plug into any standard detector rack card slot in any cabinet type. Each output is electrically isolated and is normally open. When the cards receive the appropriate serial message from SmartSensor sensors, they will close the contact outputs.



- Compatible with NEMA TS1 and TS2, 170, and 2070 traffic controllers
  - Plugs into any standard input file rack card slot
  - Fail-safe mode in case of interruption of data flow
  - Dual communication ports for separate data and configuration communication
  - Uses industry-standard RS-485 communication
  - Displays detection via LEDs on faceplate
  - Automatically sets baud rate
  - Solid state outputs
- Configurable via hardware (DIP switches) or software (front panel interface or Click Supervisor)
  - Software configuration is read-only when in Hardware Configuration mode
  - Conformal coated

**TOP**

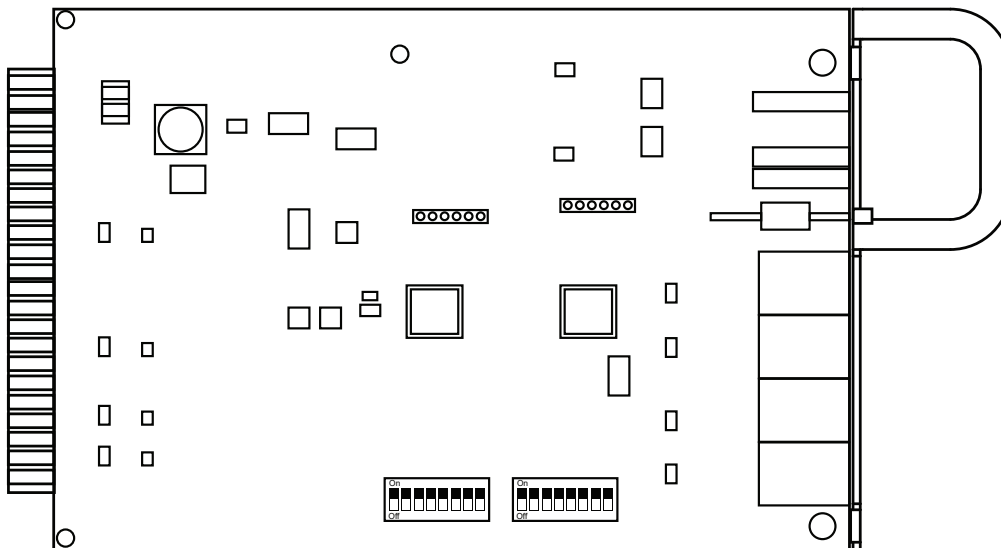

**FRONT**

